
Beaumont
cast iron

THE ROCOCO CLASSIQUE SIZE CHART

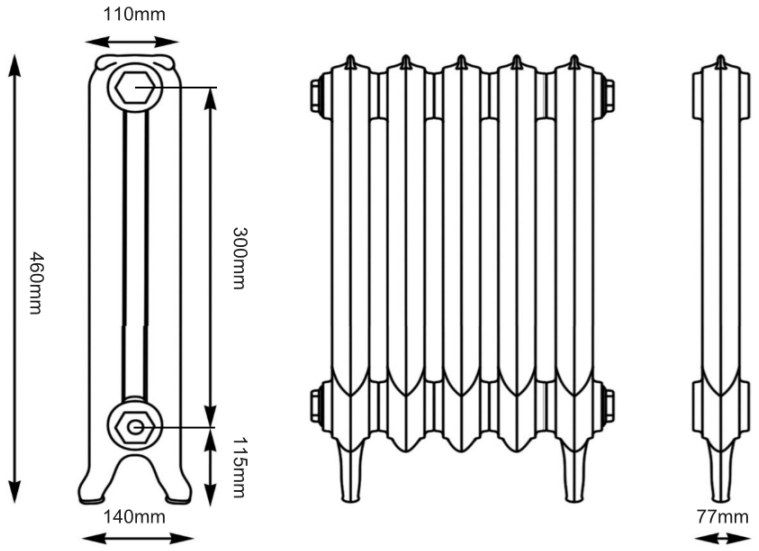


RR2460							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	265mm	293	86	553	162	696	204
4	342mm	389	114	737	216	928	272
5	419mm	488	143	925	271	1160	340
6	496mm	583	171	1109	325	1389	407
7	573mm	682	200	1293	379	1621	475
8	650mm	778	228	1477	433	1853	543
9	727mm	877	257	1662	487	2085	611
10	804mm	972	285	1846	541	2317	679
11	881mm	1071	314	2030	595	2549	747
12	958mm	1167	342	2214	649	2781	815
13	1035mm	1266	371	2399	703	3013	883
14	1112mm	1361	399	2583	757	3245	951
15	1189mm	1460	428	2771	812	3477	1019
16*	1266mm	1556	456	2955	866	3706	1086
17*	1343mm	1655	485	3139	920	3938	1154
18*	1420mm	1750	513	3323	974	4170	1222
19*	1497mm	1849	542	3508	1028	4402	1290
20*	1574mm	1945	570	3692	1082	4634	1358

*16-20 Section radiators are supplied in two parts for onsite assembly - refundable tool required

BEAUMONT CAST IRON - HURLINGHAM BUSINESS PARK, FULBECK HEATH, GRANTHAM, NG32 3HL - ENGLAND


Beaumont
cast iron

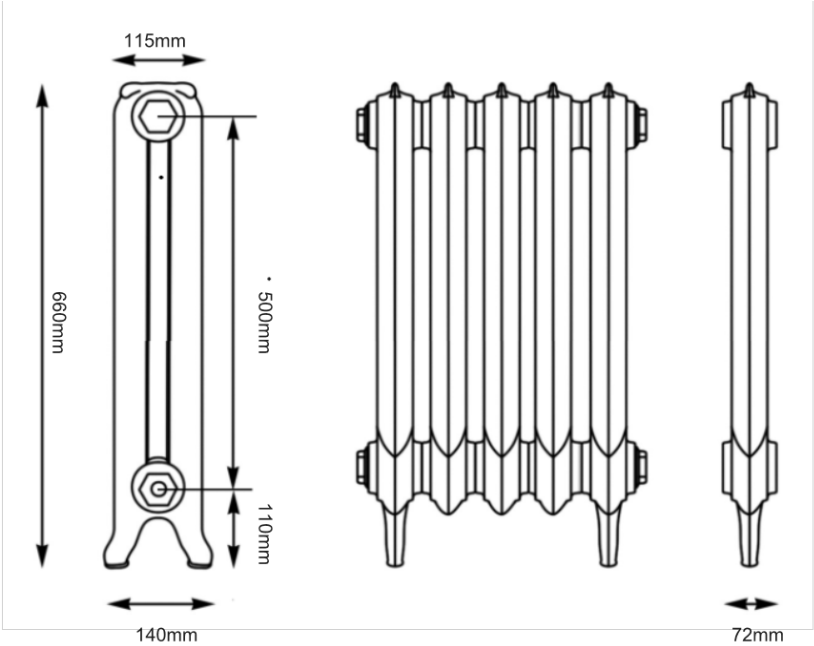

RR2660							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	259mm	375	111	711	207	891	261
4	334mm	500	148	948	276	1188	348
5	409mm	625	185	1185	345	1485	435
6	484mm	750	222	1422	414	1782	522
7	559mm	875	259	1659	483	2079	609
8	634mm	1000	296	1896	552	2376	696
9	709mm	1125	333	2133	621	2673	783
10	784mm	1250	370	2370	690	2970	870
11	859mm	1375	407	2607	759	3267	957
12	934mm	1500	444	2844	828	3564	1044
13	1009mm	1625	481	3081	897	3861	1131
14	1084mm	1750	518	3318	966	4158	1218
15	1159mm	1875	555	3555	1035	4455	1305
16*	1234mm	2000	592	3792	1104	4752	1392
17*	1309mm	2125	629	4029	1173	5049	1479
18*	1384mm	2250	666	4266	1242	5346	1566
19*	1459mm	2375	703	4503	1311	5643	1653
20*	1534mm	2500	740	4740	1380	5940	1740

*16-20 Section radiators are supplied in two parts for onsite assembly - refundable tool required


Beaumont
cast iron

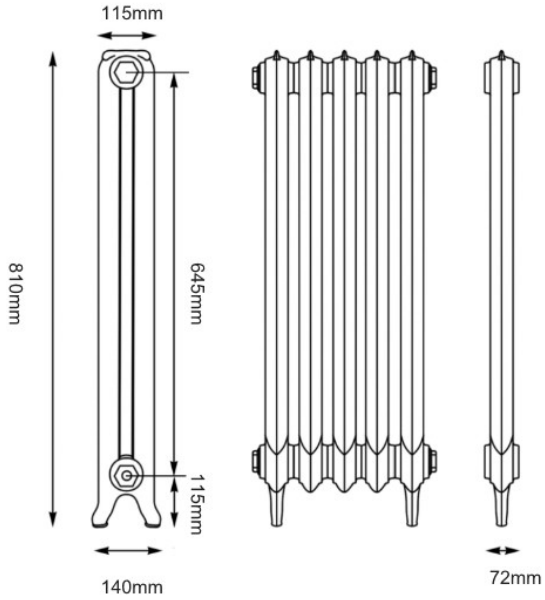

RR2810							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	250mm	474	139	911	267	1150	337
4	342mm	631	185	1215	356	1532	449
5	419mm	792	232	1518	445	1914	561
6	496mm	949	278	1819	533	2296	673
7	573mm	1106	324	2122	622	2679	785
8	650mm	1262	370	2426	711	3064	898
9	727mm	1423	417	2730	800	3446	1010
10	804mm	1580	463	3033	889	3828	1122
11	881mm	1737	509	3337	978	4211	1234
12	958mm	1897	556	3641	1067	4593	1346
13	1035mm	2054	602	3944	1156	4978	1459
14	1112mm	2211	648	4248	1245	5360	1571
15	1189mm	2371	695	4552	1334	5743	1683
16*	1266mm	2528	741	4852	1422	6125	1795
17*	1343mm	2685	787	5156	1511	6507	1907
18*	1420mm	2842	833	5459	1600	6893	2020
19*	1497mm	3003	880	5763	1689	7275	2132
20*	1574mm	3160	926	6067	1778	7657	2244

*16-20 Section radiators are supplied in two parts for onsite assembly - refundable tool required

Beaumont
cast iron

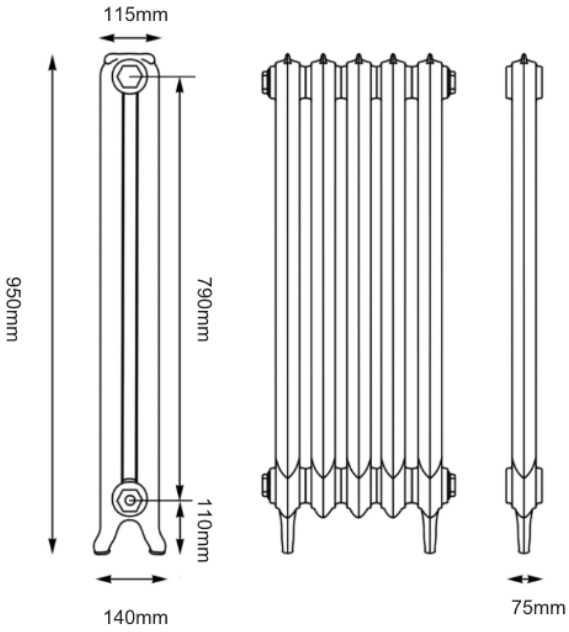

RR2950							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	259mm	531	156	987	288	1230	360
4	334mm	708	208	1316	384	1640	480
5	409mm	885	260	1645	480	2050	600
6	484mm	1062	312	1974	576	2460	720
7	559mm	1239	364	2303	672	2870	840
8	634mm	1416	416	2632	768	3280	960
9	709mm	1593	468	2961	864	3690	1080
10	784mm	1770	520	3290	960	4100	1200
11	859mm	1947	572	3619	1056	4510	1320
12	934mm	2124	624	3948	1152	4920	1440
13	1009mm	2301	676	4277	1248	5330	1560
14	1084mm	2478	728	4606	1344	5740	1680
15	1159mm	2655	780	4935	1440	6150	1800
16*	1234mm	2832	832	5264	1536	6560	1920
17*	1309mm	3009	884	5593	1632	6970	2040
18*	1384mm	3186	936	5922	1728	7380	2160
19*	1459mm	3363	988	6251	1824	7790	2280

*16-20 Section radiators are supplied in two parts for onsite assembly - refundable tool required

Overview

The ROCOCO CLASSIQUE is a Beaumont exclusive design based on an 1890's French design. This cast iron radiator gives a touch of period elegance and an amazing feature in any room within your property. The narrow scrolled profile is ideal in hallways where widths can be tight. They offer exception output and the scroll work is crisp and detailed.

Burnishing is the optimum finish for the ROCOCO CLASSIQUE to accentuate the detailed scrollwork. Burnishing paste in silver, gold or copper is carefully applied by hand over a darker base coat. This is the same traditional method used by craftsmen throughout the ages.

The ROCOCO CLASSIQUE can be finished in a variety of colours – metallic, Farrow & Ball range,RAL colours or primed for onsite painting.

Because each radiator section is specially hand cast there may often be a slight variation in the length of each radiator once built (end bush to end bush), please allow for this in your pipework fittings.

RR2460

DEPTH OF SECTION FROM SKIRTING BOARD = 140MM

SECTION WIDTH = 77MM

WEIGHT = 4.9KG

RR2660

DEPTH OF SECTION FROM SKIRTING BOARD = 140MM

SECTION WIDTH = 72MM

WEIGHT = 8.1KG

RR2810

DEPTH OF SECTION FROM SKIRTING BOARD = 140MM

SECTION WIDTH = 72MM

WEIGHT = 8.7

RR2950

DEPTH OF SECTION FROM SKIRTING BOARD = 140MM

SECTION WIDTH = 75MM

WEIGHT = 10.8KG