
Beaumont
cast iron

THE ROCOCO ROYALE SIZE CHART

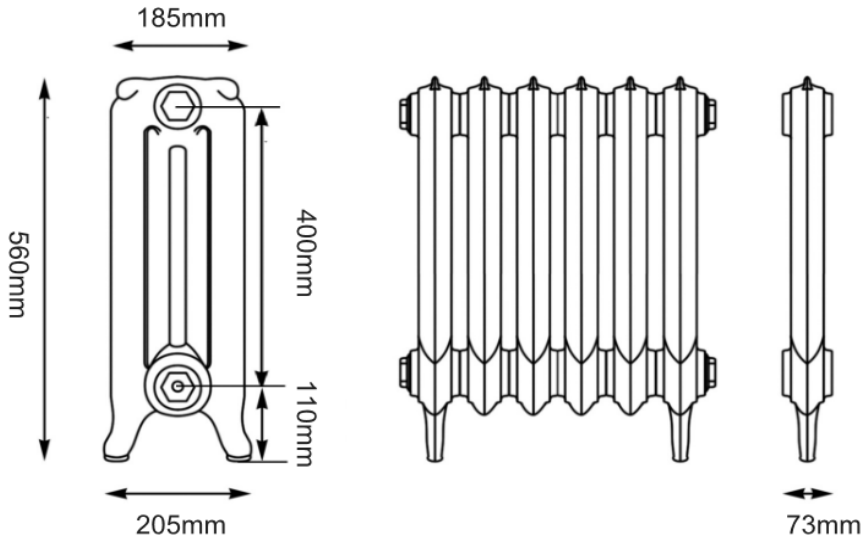


RR2560							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	253mm	459	135	864	255	1083	318
4	326mm	612	180	1152	340	1444	424
5	399mm	765	225	1440	425	1805	530
6	472mm	918	270	1728	510	2166	636
7	545mm	1071	315	2016	595	2527	742
8	618mm	1224	360	2304	680	2888	848
9	691mm	1377	405	2592	765	3249	954
10	764mm	1530	450	2880	850	3610	1060
11	837mm	1683	495	3168	935	3971	1166
12	910mm	1836	540	3456	1020	4332	1272
13	983mm	1989	585	3744	1105	4693	1378
14	1056mm	2142	630	4032	1190	5054	1484
15	1129mm	2295	675	4320	1275	5415	1590
16*	1202mm	2448	720	4608	1360	5776	1696

*16 Section radiators are supplied in two parts for onsite assembly - refundable tool required

BEAUMONT CAST IRON - HURLINGHAM BUSINESS PARK, FULBECK HEATH, GRANTHAM, NG32 3HL - ENGLAND

Beaumont
cast iron

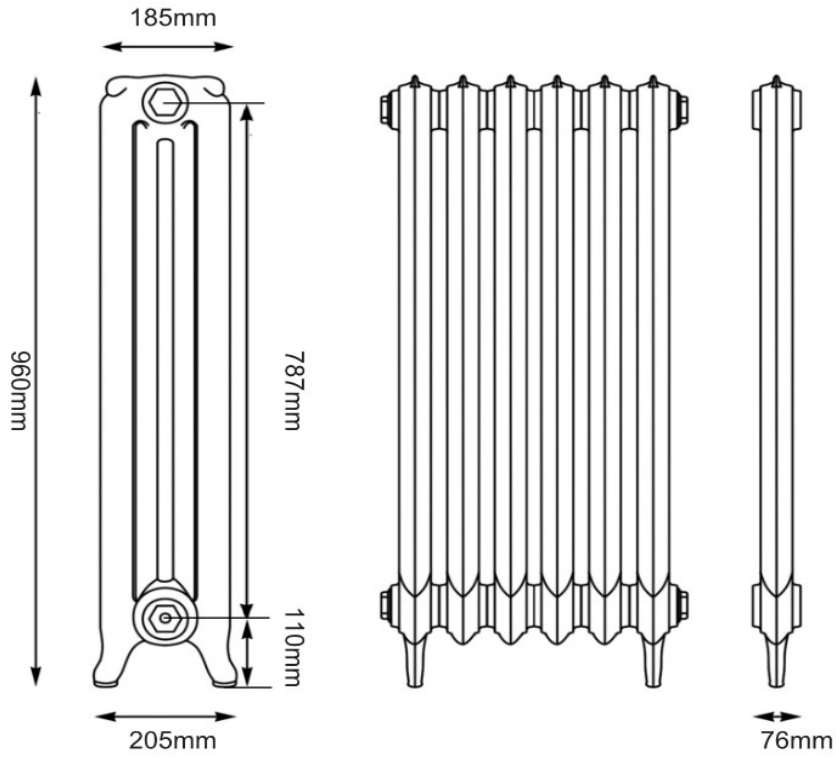

RR2960							
Sections	Length (inc. bushes)	BTU's (ΔT 30°)	Watts (ΔT 30°)	BTU's (ΔT 50°)	Watts (ΔT 50°)	BTU's (ΔT 60°)	Watts (ΔT 60°)
3	262mm	765	225	1467	429	1848	543
4	338mm	1020	300	1956	572	2464	724
5	414mm	1275	375	2445	715	3080	905
6	490mm	1530	450	2934	858	3696	1086
7	566mm	1785	525	3423	1001	4312	1267
8	642mm	2040	600	3912	1144	4928	1448
9	718mm	2295	675	4401	1287	5544	1629
10	794mm	2550	750	4890	1430	6160	1810
11	870mm	2805	825	5379	1573	6776	1991
12	946mm	3060	900	5868	1716	7392	2172
13*	1022mm	3315	975	6357	1859	8008	2353
14*	1098mm	3570	1050	6846	2002	8624	2534
15*	1174mm	3825	1125	7335	2145	9240	2715
16*	1250mm	4080	1200	7824	2288	9856	2896

*13-16 Section radiators are supplied in two parts for onsite assembly - refundable tool required

Overview

Because All Beaumont cast iron radiators are carefully hand built to your own required BTUs and fully assembled ready for plumbing into your new or existing pipework.

Burnishing is the optimum finish for the Rococo Royale to accentuate the detailed scrollwork. Burnishing paste is carefully applied by hand over a darker base coat.

The Rococo Royale can be finished in a variety of colours – metallic, Farrow & Ball range, RAL colours

or primed for onsite painting.each radiator section is specially hand cast there may often be a slight variation in the length of each radiator once built (end bush to end bush), please allow for this in your pipework fittings.

DEPTH OF SECTION FROM SKIRTING BOARD = 103MM

SECTION WIDTH = 73mm (RR2560) - 76mm (RR2960)

WEIGHT = 8kg (RR2560) -16.6kg (RR2960)